PCT





INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(C4) T (C 17) (C 27)	$\overline{}$			
(51) International Patent Classification 3:		(11) International. Publication Number: WO 80/02850		
D04H 3/04; B65H 81/00	A1	(12) 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		
		(43) Internati nal Publication Date: 24 December 1980 (24.12.80)		

(21) International Application Number: PCT/BR79/00005

(22) International Filing Date: 13 June 1979 (13.06.79)

(71) Applicant; and

(72) Inventor: HONDA, Takeshi [BR/BR]; Rua Comendador Yamamoto, No. 85, 05519 São-Paulo SP (BR).

(74) Agent: BRUNNER, Edmundo; Alameda Joaquim Eugenio de Lima, 1769, 01403 São-Paulo SP (BR).

(81) Designated State: BR.


Published

With international search report

(54) Title: DEVICE AND PROCEDURE FOR MANUFACTURING TUBULAR CLOTHS

(57) Abstract

Device and process for manufacturing tubular cloths, comprising a vertical tube (1), internally heated (2), having a rotating table (3) around tube (1), also sliding along its length, so as to distribute warping yarns along the center line of the tube, and texture yarns transversally thereto, said yarns adhering by overlapping, thus shaping a continuous tube, which is cut alongside of its center line, forming a strip of cloth.

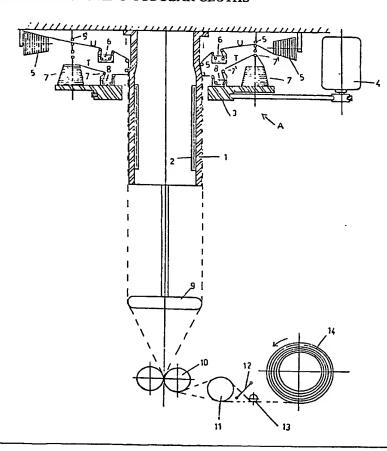

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

		LI	Liechtenstein
AT	. Austria	LU	Luxembourg
ΑŪ	Australia	MC	Monaco
BR	Brazil	MG	Madagascar
CF	Central African Republic	MW	Malaŵi
CG	Congo	NL NL	Netherlands
CH	Switzerland	NO	Norway
CM	Cameroon	RO	Romania
DE	Germany, Federal Republic of	SE	Sweden
DK	Denmark	SN	Senegal
FR	France	SU	Soviet Union
GA	Gabon	TD	Chad
GB	United Kingdom	TG	Togo
HU	Hungary	US	United States of America
JP	Japan	03	Office States of Afficience
KP	Democratic People's Republic of Korea		

"DEVICE AND PROCEDURE FOR MANUFACTURING TUBULAR CLOTHS".

Said patent of invention relates

05. to a "DEVICE AND PROCEDURE FOR MANUFACTURING TUBULAR

CLOTHS ", through a simple overlapping and binding of the yarns normally shaping the warping and the texture. Said yarns, without being known, are bound

by adherence, thus shaping a cylindrical continuous

10. tube, which is further cut at its side, toward the center line of the tube, so as to finally form a strip of "non-woven cloth".

The process herein referred to allows a high speed production of cloth.

By using a simple equipment, it is possible to form figures and drawings, through variation of the gaps among the yarns. On the other hand, the lengthening of the cloth forced by stress, either by the yarns of the texture or the warping,

20. is practically negligible, since it is so small. Said fact constitutes one of the advantages of the product obtained through the process herein discussed.



Attached hereto are drawings illustrating this invention, as follows: figure lis a general view of the equipment intended to produce the cloth referred to; figure 2 is a view of the 05. part of the device, and figure 3 is a view of the lower thereof; figure 4 is an example of a obtained in the cloth, through the application a mechanism intended to the drawing, which is showed at figure 5; figure 6 shows a transversal view, with 10. an example of the cloth produced in two overllaped layers.

According to the prior weaving art; the yarns in the warping are taken by the shuttle through the yarns of the texture, so as to 15. comprise the texture. Presently, the weaving frames to produce coths are extremely fast. But, the process used according to the object of the invention is much faster, since no weaving of the yarns occurrs; the yarns comprising the warping, 20. through an extremely fast rotating motion, are coiled around the yarns of the texture and, at the same time, are "forged" on each other, so as to a solid tubular shaped screen, which is further cut alongside the tube's center line, so as to a strip of cloth that was much more rapidly obtained, 25. with a noticeable decrease of cost. As already said, it is possible to determine, through a simple

mechanical device, the approach or slaying of



the

transversal yarns, in such a way that the most varied possible drawings may be made.

One of the main applications of this "non-woven cloth" is the manufacture of a of a waterproof canvas, which is obtained by application of a thermoplastic film on the faces of the cloth, or through a waterproofing paste, gelatinized by means of heat. The canvas so manufactured is used as oil-cloth and tents, containers and even as one pneumatic structures for storage purposes.

The canvas obtained by the prior art process, according to which its structure is made of cloth, by means of weaving frames, has the disadvantage of being lengthened as in the same line of the warping, upon stress, which obviously decreases its waterproofing qualities, thus making the canvas damaged.

The lengthening or stretching due to stress, either in the warping or the 20. yarns are practically avoided in the cloth obtained through the device object hereof, since there is already a "binding" in every point each yarn of warping touches each yarn of the texture, in such way that the canvas made with this cloth cannot bе stressed. Therefore, its intrinsic qualities are 25. not changed, and since the so called "binding" among yarns is obtained through a high frequency "weld", it



is extremely resistant, for there is a welding of the material, which implies a practically indestructible binding, under normal usage.

On the other hand, taking into 05. account that the binding of the yarns makes a much more resistant cloth, it is possible to use a lower diameter and number of yarns, with a consequent lower cost of the cloth.

It is also foreseen the yarns of the warping and the

10. adherense among the yarns of the warping and the texture, by means of a special adhesive that also assures the strength of the product.

The object of this patent of invention is a "DEVICE AND PROCESS FOR

- 15. MANUFACTURING TUBULAR CLOTHS ", from a sinthetic material yarn, and comprised by a flat surface tube (1), with and internal continuous tubular resistance (2), coaxial with said tube, near one of its ends, there is a rotating table (3), conveniently driven
- 20. by external means (4), said table being allowed to move around the tube and, at the same time, to slide along its length, in such a way that, by moving so, the yarns of the warping (U) and the texture (T)shall be distributed. There are provided reels (5),
- 25. conveniently fixed to the support where the tube (1) is bound, said reels containing the yarns of the warping, with guides (5') to facilitate the unwinding of the yarns and guide the position of said



yarns (U), which pass previously by a vessel containing adhesive. Other reels (7) are located on the rotating table, with the yarns (T) of the texture, which pass by guides (7') through tubs (8) also containing adhesive and through cams that guide

- os. also containing adhesive and through cams that guide their position in relation to the cylindrical body (1) and, therefore, in relation to the yarns (U) of the warping. At the end opposite to the rotating table coaxial to the body (1) there is a guide (9)
- 10. for the tubular shaped cloth, with the shape of a cylindrical ring, with rounded edges.

Beyond said guide (9), there is a stressing device of the warping yarns, already in the woven tubular set, which passes through an internal circular guide (11), intended to keep the cloth distended with the shape of a tube, guiding it toward a cutting means (12) conveniently located,

after which this latter passes through a linear 20. guide (13), transversal in relation to the strip, thus permitting the coiling (14), as a plane or strip.

which cuts the cloth toward the tube's center

There may be a guiding system (14) on the rotating table, which system is guided by 25. fixed cams (15), move the yarns (T), so as to create an infinite variation of drawings in the final cloth, as disclosed in the figure 4.



line.

BNSDOCID: < WO_--- 8002850A1_I_>

CLAIMS

1st.) " DEVICE AND PROCESS FOR MANUFACTURING TUBULAR CLOTHS ", from a shynthetic material yarn, the feature of which is to Ъe 05. comprised by a flat surface vertical tube (1), with internal continuous tubular resistance (2), to said tube; near its upper end there is a rotating table (3), conveniently driven by external means (4), table intended to turn around the tube and, at the 10. same time, slide along its length, so as to distribute along the tube the warping (U) and the texture (T) yarns.

2nd) " DEVICE AND PROCESS FOR MANUFACTURING TUBULAR CLOTHS ", according to claim 1, whose feature is to have conveniently located, on the 15. support of the tube(1)reels(5)containing the warping yarns with guides(5')that facilitate the unwinding of the yarns and guide the position thereof, said yarns passing previously by a vessel (6) containing 20. adhesive; on the rotating table (3) there are reels (7) with the texture (T) yarns, which pass through guides (7'), through tubs (8), also containing adhesive, and through cams guiding their

05.

the

position in relation to the yarns (U) of the warping; at the end opposite to the rotating table coaxial to the body (1) there is a guide (9) for the cloth, which is a tubular shaped guide, with cylindrical ring form, with rounded edges.

3rd) "DEVICE AND PROCESS FOR MANUFACTURING TUBULAR CLOTHS", according to the above claims, whose feature is that, beyond: said guide (9), there is a stressing means (10) of the warping yarns, already in the woven tubular means, which passes through a stressing internal circular guide (11), to the tube-shaped cloth, guiding it

cloth toward the tube's center line, after which it

15. passes through a linear guide (13), transversal to
the strip, allowing the consequent winding (14) as a
plane or strip.

toward a convenient cut means (12), which cuts

4th) "DEVICE AND PROCESS FOR MANUFACTURING TUBULAR CLOTHS", according to claim 20. 1, whose feature is to have on the rotating table a guiding system (14) which, guided by fixed cams (15), move the yarns (T), so as to create drawings in the final cloth, as disclosed in the figure 4.



BNSDCID: <WO___8002850A1_I_>

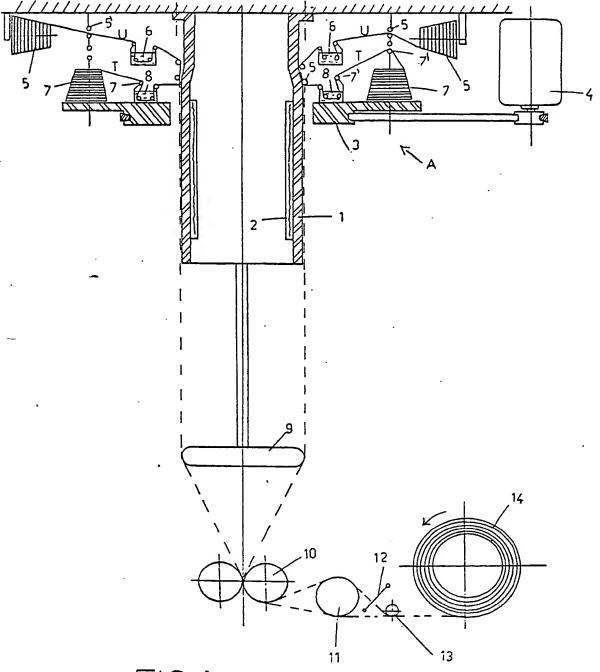
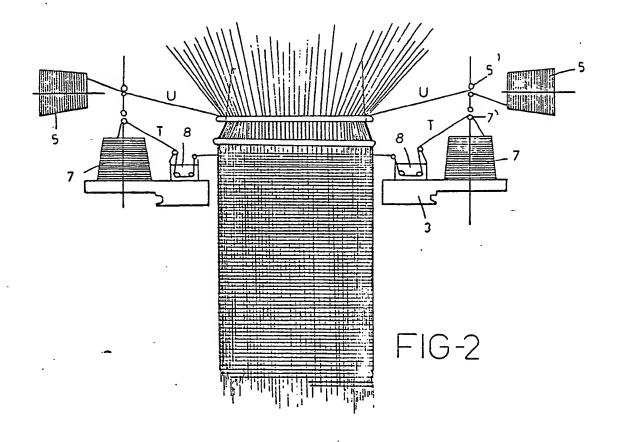
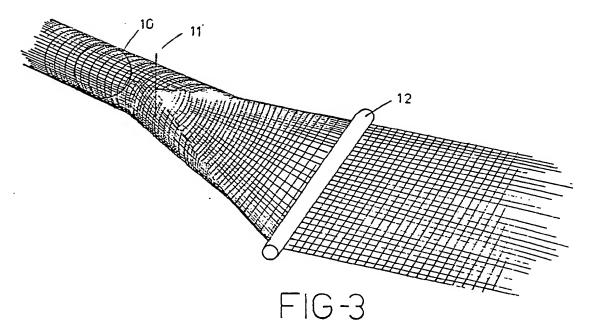


FIG-1












FIG-4

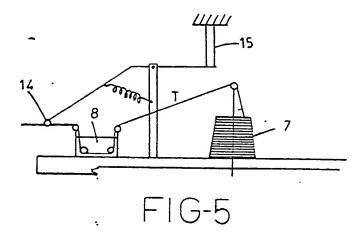


FIG-6



			International Application No PCT/BR 79/0000			
I. CLASSIF	ICATIO	ON C	OF SUBJECT MATTER (if several classification symbols apply, Indicate all) 3			
According to	Interna (1)	tiona ./.	al Patent Classification (IPC) or to both National Classification and IPC			
B65H	81/	<u>'</u>	Int. Cl. 156/174 US. CL. 156/426			
II. FIELDS	SEARC	HED				
Classification	System	1	Minimum Documentation Searched 4 Classification Symbols			
		T	Classification Symbols			
US	US 156/167, 174, 177, 271, 426, 433, 439, 440, 441					
	Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched 5					
			NONE			
III. DOCUM	ENTS (ON	ISIDERED TO BE RELEVANT 14			
Category •			of Document, 16 with indication, where appropriate, of the relevant passages 17 Relevant to Claim No. 18			
X			2,797,728, Published 02 JULY 1957, 1-3			
		•	Figs. 1, 2, 9, col. 5, 11. 55-71 SLAYTER ET AL.			
X U	JS,	Α,	3,342,664, Published 19 SEPTEMBER 1967, 1-3 Figs. 1-3			
X U	JS,	Α,	3,384,521, Published 21 MAY 1968, Figs. 1-3 BORUP			
x U	JS,	Α,	3,391,039, Published 02 JULY 1968, 1-3 Figs. 1. 2			
x U	is, A	Α,	BASCOM ET AL. 3,475,264, Published 28 OCTOBER 1969, Figs. 7-8, col. 1, 11. 65-71			
χ U	s, A	Α,	DONALDSON 3,855,036, Published 17 DECEMBER 1974, Figs. 1-2 SOLBECK			
X U	S, A	Α,	3,095,338, Published 25 JUNE 1963, Fig. 2			
* Special cate	gories o	f cite	ed documents: 15			
"A" document	t definin cument	g the	published on or after the international "P" document published prior to the international filing date but on or after the priority date claimed			
to in the "O" document	other c	atego	o an oral disclosure, use, exhibition or the invention			
IV. CERTIFIC	ins		"X" document of particular relevance			
			etion of the International Search 2 Date of Mailing of this International Search Report 2			
13 SE	ው ጉፔኤ	प्रद	24 SEP 1070			
13 OBT 15 DER 1976						
ISA/US		, AU	Signature of Authorized Officer 10 MICHAEL W. BALL			
			I IIIGIIALLE We DALLE			

Form PCT/ISA/210 (second sheet) (October 1977)

